



TSP Series **TSP-4** bollard with card collector

The TSP-4 card collector bollard as a additional authentication pedestal, it can be connected with any type turnstile usually. Most of using situation for visitor or tourist.

The reader can be mounted either behind the post top plate providing a flush surface or if preferred the reader can be mounted proud of the top plate. To ensure the artistic appearance, powder and communication cables can be run to the reader from inside the bollard to the reader.

An access hole at the base of the bollard allows cables to pass through and an earthing bolt is supplied as standard.

Features


- Grade 304 stainless steel
- [•] Large capacity 500 cards
- Locking and removable bollard
- Small footprint


- Various access control
- Anti-fraud

Card box specification

Working temperature	Working voltage	Dimension of card	Thickness of card	Card signal output
-15℃~50℃	DC 24V±10%	86*54mm(ISO criterion PVC card	Max 4mm	Wiegand

Dimensions (mm)

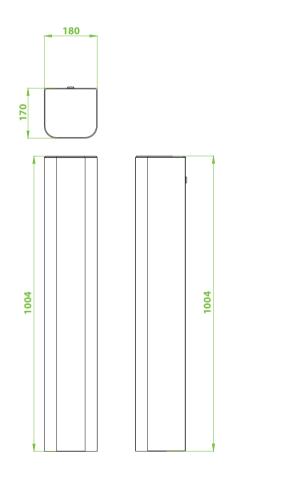

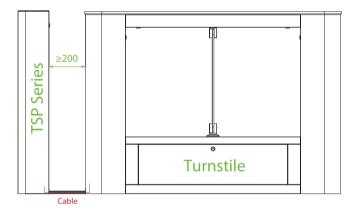





V1.0 2022.01.10